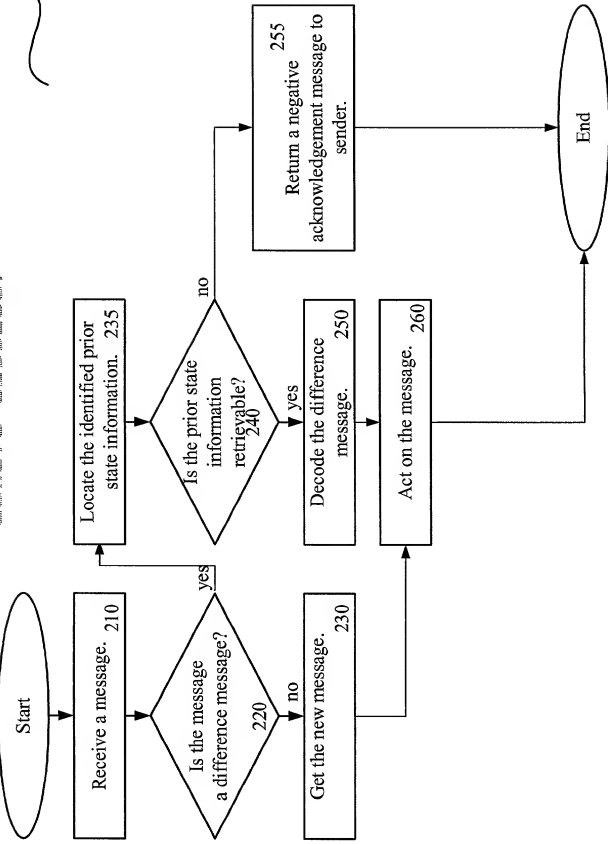
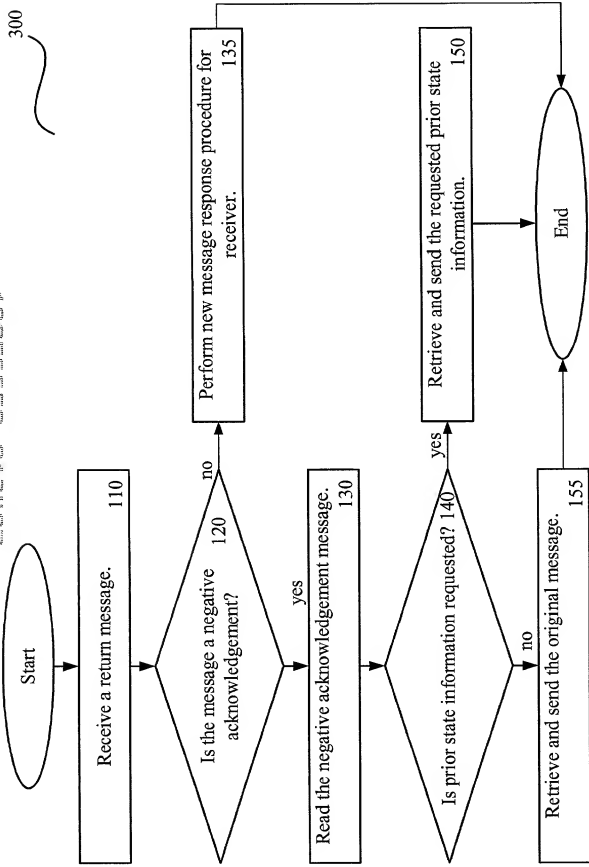


FIGURE 1

**FIGURE 2**

**FIGURE 3**

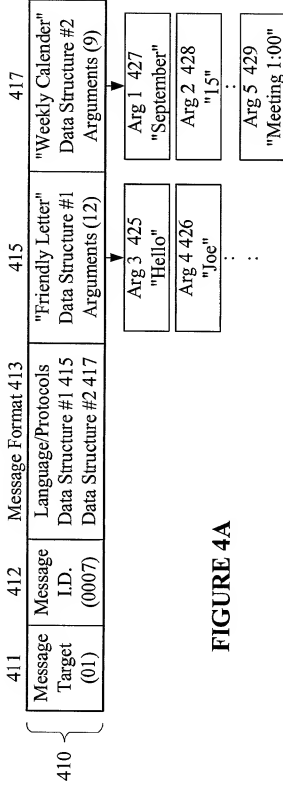


FIGURE 4A

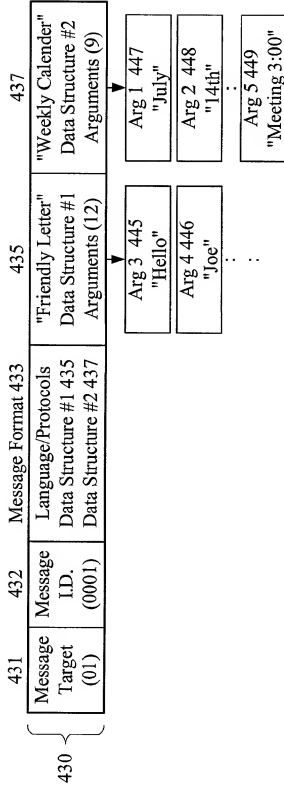


FIGURE 4B

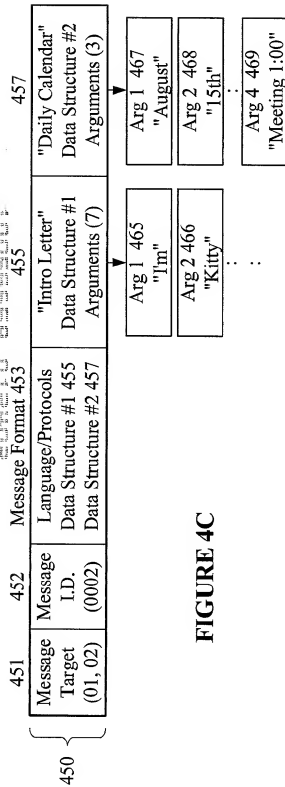


FIGURE 4C


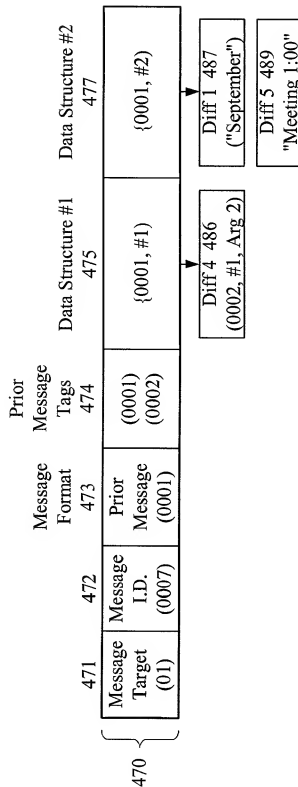


FIGURE 4D

Sender Computer 510




Sender formatted
message:
{obj, f(a, b, c)}
520

Marshal arguments
530

Construct difference
message
{Arguments}
540

Transport marshalled
difference message
arguments
550

Receiver Computer 590



Receiver formatted
message:
{impl, f(a, b, c)}
580

Demarshal arguments
570

Decode difference
message arguments
560

FIGURE 5

500